

# **A User-Centric Framework for Assistive Robot Control via Wearable Sensing**

Janavi Gupta

December 2025

School of Computer Science  
Carnegie Mellon University  
Pittsburgh, PA 15213

**Research Advisor:**  
Zackory Erickson

*Submitted in partial fulfillment of the requirements  
for the Senior Honors Thesis*

**Keywords:** *Assistive Robotics, Wearable Sensing, Human-Robot Interaction, Active Control, Shared Control, Passive Control*

*To my Nanu. I wish you were here to read this.*

## Abstract

Physically assistive robots have the potential to support individuals with motor impairments in performing Activities of Daily Living (ADLs) and Instrumental Activities of Daily Living (iADLs), yet their usefulness depends critically on how users can interface with them. Traditional control frameworks are rooted in industrial and surgical robotics and do not reflect the priorities of users in assistive contexts, such as preserving a sense of agency, comfort, long-term use, etc, thereby underscoring the need for a more user-centered framing. At the same time, sensors such as inertial measurement units (IMUs) and electromyography (EMG) embedded in wearable devices have been increasingly leveraged as control interfaces for assistive robots, with their form factor and ability to capture subtle, on-body signals presenting unique opportunities for natural, user-aligned control across varying levels of motor ability.

Hence, this work introduces a user-centric framework that defines three levels of control, namely active, shared, and passive control, and situates wearable sensing modalities within each level. While wearable-based active and shared control have been explored in literature, passive control using wearables remains comparatively underexamined. Building on limited prior work that demonstrated the feasibility of wearable-based passive sensing for bite timing, we conduct a thematic analysis on participant feedback on WAFFLE, a wearable-based bite-timing system for robot-assisted feeding involving fifteen able-bodied participants and two participants with motor impairments. Our analysis identifies recurring themes of feeling of control, natural pacing, low workload, and social compatibility, demonstrating that implicit cues can enable interactions that feel intuitive and responsive without requiring explicit user commands. Together, these findings highlight the unique potential of wearable-based passive control systems that can align with natural human behavior to support user-aligned control interfaces.

## Acknowledgements

None of the work presented in this thesis would have been possible without my advisor, mentors, friends, and family.

I would like to thank my advisor, Professor Zackory Erickson, who has been extraordinarily supportive throughout my 3 years of research at the Robotic Caregiving and Human Interaction Lab (RCHI). His trust in letting undergraduates lead meaningful projects has shaped my confidence, and I greatly appreciate the opportunities he created for me.

I am deeply grateful to my mentor, Akhil Padmanabha, whom I've had the pleasure of working with for the last 3 years. He has been instrumental in both my academic and personal growth. He has consistently offered honest advice, clear guidance, and always encouraged me to trust my abilities and decisions, without which many things would not have been possible. I would also like to thank my mentor Kavya Puthuveetil, who I've worked with for the past year. Her feedback and patience has made me much more confident in my work. Strong mentorship has played an essential role in my growth, and I am deeply grateful to have learned from people who have guided me with such care and honesty.

I would also like to thank everyone from the RCHI Lab. Our lab has truly been a place where I found friends, mentors, and a community I genuinely enjoy being part of. I'm grateful for the laughter, conversations, collaboration, and endlessly fun socials.

My friends at CMU have been one of my strongest support systems. Their encouragement and humour made even the most stressful weeks feel manageable. Thank you for listening to my ideas that made no sense and patiently accepting my weekly "we are scrapping this" updates.

Finally, to my parents and my brother, thank you for everything. I am who I am because of you. I carry your faith in me in everything I do.

# Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
<b>2</b>	<b>Wearable Devices</b>	<b>3</b>
2.1	Myoelectric Interfaces (EMG/HDEMG)	3
2.2	Inertial Measurement Units (IMUs)	4
2.3	Commercially Available Wearables	5
<b>3</b>	<b>User-Centric Levels of Control</b>	<b>5</b>
3.1	Active Control	6
3.2	Shared Control	7
3.3	Passive Control	8
3.3.1	WAFFLE: A Wearable Approach to Bite Timing Estimation in Robot-Assisted Feeding	9
3.3.2	Thematic Analysis	11
3.3.3	Reflection	13
<b>4</b>	<b>Future Work and Opportunities</b>	<b>13</b>
<b>5</b>	<b>Conclusion</b>	<b>14</b>



**Figure 1: An overview of the pipeline to use sensors as robot control interfaces: Diverse sensing modalities such as EMGs, IMUs, and contact microphones are embedded into everyday wearable form factors such as glasses, rings, wristbands, hats and sleeves. They capture user motion and physiological cues that are then processed to infer human intent and gestures, enabling robots to execute tasks through wearable control interfaces.**

## 1 Introduction

Motor impairments can drastically limit a person’s ability to carry out Activities of Daily Living (ADLs), which are defined as fundamental self-care tasks, including bathing, eating, and dressing, as well as Instrumental Activities of Daily Living (iADLs), which include more complex activities necessary for independent living, such as home management, cooking, and cleaning. In the United States alone, approximately 5 million individuals live with partial or total paralysis arising from stroke, spinal cord injury, neurodegenerative disorders, or progressive muscular diseases [1]. As a result, such individuals with reduced motor function must rely heavily on caregivers for routine tasks such as scratching an itch, bringing food to the mouth, opening a door, or moving objects across a countertop [2, 3, 4, 5]. This can significantly affect independence, sense of agency, and overall quality of life. For these individuals, the loss of motor function fundamentally reshapes how they navigate daily routines, underscoring the need for technologies that can help them regain control in daily life.

Physically assistive robots are designed to help individuals perform tasks that they would otherwise find difficult due to their motor impairments, such as feeding, grooming, dressing, or manipulating objects around the home [6, 7, 8, 9, 10]. These robots have the potential to support individuals in performing everyday tasks more independently and reduce caregiver burden while improving overall quality of life. However, realizing these benefits requires robots to be controlled in ways that respect each user’s abilities, preferences, and desired degree of involvement.

A key challenge is that the prevailing definitions of control in robotics are rooted in autonomous manipulation and teleoperation frameworks developed for industrial, surgical, and mobile robots. These models typically optimize for efficiency, precision, or autonomy that do not

map cleanly onto assistive contexts where user comfort, agency, and long-term use matter much more. As a result, many existing control paradigms implicitly assume that the robot should either execute tasks independently or respond only to direct, unambiguous commands. Such assumptions break down in caregiving scenarios. Assistive tasks are deeply personal, often preference-laden, and embedded in social and contextual cues. They require an interface perspective that is grounded in the user’s experience of control. This motivates the need for a user-centric framework that articulates how different forms of control- direct, blended, or implicit- shape the interaction between users and assistive robots.

Within this landscape, wearable devices have emerged as a promising way to bridge user intent and robot behavior. They embed sensors, most commonly inertial measurement units (IMUs) and electromyography (EMG), into wearable devices and can be used to control assistive robots. Because these devices capture on-body signals directly from the user, they can sense small, residual movements that may be too subtle for camera-based interfaces or impossible to express through handheld devices. They also avoid many of the limitations of environmental sensing: unlike vision-based systems, they are robust to occlusion, lighting changes, and cluttered home environments [11, 12, 13], and unlike stationary interfaces such as joysticks or sip-and-puff devices, they do not restrict the user’s posture or require access to a fixed surface. These characteristics make wearable interfaces a promising and increasingly practical way for enabling users to interact with assistive robots.

At the same time, passive control with wearable devices has emerged as a particularly underexplored mode of interaction for assistive robotics. In our framework, passive control refers to scenarios where wearable devices detect naturally occurring human cues and use these signals to modulate robot behavior without requiring explicit commands. Crucially, passive control is not the same as full autonomy: in fully autonomous systems, the robot initiates and sequences actions based on its own pre-determined timing and sequencing, independently of the user’s behavior or readiness, whereas in passive control, the robot still responds directly to the user, just through implicit rather than deliberate input.

In this paper, we consider how levels of robot autonomy can be reframed from a user-centered perspective in assistive contexts, and we examine how wearable sensing modalities intersect with these levels of control. In particular, we focus on the potential of wearables to serve as passive control interfaces. By performing a thematic analysis on a case study of a wearable-based bite-timing system for robot-assisted feeding, we examine how users experience passive control, what cues feel natural or reliable, and how wearable systems can protect users’ sense of agency even in the absence of explicit commands. Our findings reveal 4 common patterns across participants, namely feelings of control, natural cues, low workload, and social compatibility. These suggest that passive wearable sensing can meaningfully shift how assistive robots integrate into users’ daily lives.

The contributions of this work are as follows:

- We review prior work that uses wearable devices in caregiving and assistive-robotics settings, examining how on-body sensing has been applied across tasks and user abilities.
- We introduce a user-centric framework that defines three levels of control in assistive robotics: active, shared, and passive, and show how different wearable sensing modalities can be used as interfaces for each control level.

- We examine passive control using wearable sensing through a thematic analysis of user feedback from a wearable-based bite-timing system for robot-assisted feeding, including 15 able-bodied participants and 2 participants with motor impairments, identifying themes of control, natural cues, low workload, and social compatibility.

## 2 Wearable Devices

Wearable devices have shown a lot of promise at capturing physiological and behavioral signals in daily life. They can monitor motion, muscle activation, posture, speech-related vibrations, heart rhythms, and a range of other bodily signals continuously and unobtrusively. This has driven their widespread adoption in clinical, research, and consumer contexts for gait analysis, fall detection, neuromuscular and activity tracking, etc. [14, 15, 16, 17, 18, 19, 20]. These same sensing capabilities make wearable devices uniquely promising as control interfaces for assistive robotics, where understanding a user’s intent, comfort, and current state is essential for safe and personalized interaction. Figure 1 provides an overview of how diverse sensors are embedded into everyday wearable form factors and transformed into robot control inputs.

In the context of robot control, wearable devices offer several advantages over traditional interfaces such as joysticks, sip-and-puff devices, web interfaces, or camera-based tracking. First, because they are mounted directly on the body, wearable devices can pick up residual movements that are too subtle for vision systems and too limited for handheld or desktop devices, which is an important consideration for individuals with motor impairments. Second, on-body sensing is unaffected by occlusion, poor lighting, cluttered environments, and changes in seating position, all of which commonly occur in homes. Third, wearable devices support continuous measurement of movement or muscle activity, enabling both fine-grained active control and more advanced shared or passive control strategies. Finally, they can be used without constraining the user’s posture or requiring them to face a particular direction, providing flexibility during everyday tasks.

Although wearable technology encompasses a wide range of devices, such as smartglasses, body-mounted cameras, smart textiles, physiological patches, etc, we focus on wearable devices with sensors whose primary function is to capture on-body physiological signals, rather than environmental signals. This distinction is important since many body-mounted devices record the world around the user (e.g., egocentric videos), but for assistive robot control, the most useful wearable devices are those that directly sense the user’s intent through subtle behavioral cues.

Because of this, we narrow our attention to two types of sensors that have seen the most sustained use in assistive robotics: electromyography (EMG/HDEMG) and inertial measurement units (IMUs). We also explore how commercially available wearable devices provide different form factors that integrate these sensor types. While these examples anchor the discussion, the broader control framework we develop in later sections can support a wider range of sensing modalities.

### 2.1 Myoelectric Interfaces (EMG/HDEMG)

EMG interfaces capture the electrical activity produced by skeletal muscle activity. Surface EMG (sEMG) sensors detect these signals non-invasively from electrodes placed on the skin, while high-density EMG (HDEMG) arrays capture more detailed spatiotemporal patterns across

multiple muscle fibers. The amplitude and frequency of EMG signals correlate with muscle activation strength, enabling continuous decoding of user intent. These signals can be translated into discrete gestures, proportional velocity control, or context-aware triggers based on the task.

EMG sensing has long been used in clinical and rehabilitative contexts to monitor neuromuscular health and motor recovery. For example, EMG biofeedback therapy is a common rehabilitation method for post-stroke patients and individuals with motor impairments, helping them relearn muscle coordination [21, 22]. Wearable EMG systems have been developed for monitoring muscle fatigue [15, 23, 24], prosthetic limb training [25, 26], and early detection of neuromuscular disorders [16, 18]. These applications demonstrate EMG’s ability to capture intention-driven signals directly from the body. Given these properties, EMG naturally extends to the control of assistive robots. They have been used to control robotic manipulators [27, 28, 29, 30, 31] and mobile platforms [32, 33], allowing individuals with motor impairments to easily perform tasks with intuitive robot mappings.

EMG-based interfaces are particularly powerful for individuals who retain some voluntary muscle movement but have limited gross motor function: they provide a direct, body-based channel for expressing intent when movements are too small or inconsistent for vision-based or inertial sensing systems to detect. However, the same reliance on muscle activity presents challenges. For users with minimal or highly variable activation, EMG can become noisy or unreliable, leading to missed detections or false triggers. In these cases, alternative sensing modalities, such as IMUs, eye-tracking, or physiological sensors, may offer more consistent performance. Understanding where EMG excels and where it struggles is, therefore, important when selecting wearable inputs for assistive robot control.

## 2.2 Inertial Measurement Units (IMUs)

IMUs are sensors that measure acceleration, velocity, and magnetic orientation by fusing a gyroscope, accelerometer, and magnetometer together. By integrating these signals, IMUs estimate motion, orientation, and posture without requiring external cameras or tracking systems. When embedded in wearable form factors such as headsets or garments, IMUs provide continuous, high-frequency information about the movement of the user. Their robustness to lighting, occlusion, and environmental clutter has made them a widely adopted tool for capturing human motion unobtrusively.

IMU wearables have been extensively used in healthcare and rehabilitation by clinicians to capture quantitative measures of gait [14, 34, 19], posture [35, 36, 37], and limb activity [38, 39]. They have also shown their effectiveness in tracking joint kinematics for stroke patients. [17, 40, 41] IMUs have also been used to monitor and quantify everyday motor activities in people with impairments and older adults [42, 43, 20]. These applications highlight IMUs’ ability to capture fine-grained, continuous behavioral data in both clinical and real-world environments. Given these sensing capabilities, IMUs have become a natural choice for wearable robot-control interfaces. They have been used to teleoperate mobile manipulators and robotic arms by mapping head-, hand-, or whole-body motion to robot base or end-effector movement [44, 45, 46, 47, 48, 49, 50, 51, 52, 53]. These interfaces support proportional, real-time input and can operate reliably even when vision-based tracking is infeasible.

IMU-based interfaces are most appropriate for users with reliable, repeatable motion in the head, torso, or upper body. They are especially advantageous when vision-based systems are

impractical due to lighting conditions. IMUs offer continuous, proportional control that mirrors natural body motion, supporting both active and shared autonomy paradigms. However, IMUs require stable mounting, occasional recalibration to mitigate drift, and careful mapping to avoid fatigue during long-term use. For users with inconsistent movement or minimal motor ability, other modalities, such as EMG, eye-tracking, or physiological sensing, may provide greater reliability.

### 2.3 Commercially Available Wearables

Commercial wearables, such as smartwatches, smartglasses, and sensor-enabled rings, have made these sensing capabilities mainstream. These devices typically integrate IMUs, heart-rate sensors, PPG, ECG, microphones, etc., enabling continuous monitoring of motion, cardiovascular activity, sleep, and safety-related events. Because these sensing modalities mirror many of the signals used in assistive-robotics research, commercially available wearables provide a practical, widely distributed foundation for future robot interfaces.


Commercial smartwatches have been used to detect atrial fibrillation and irregular heart rhythms [54, 55, 56], for reliable fall detection in older adults [57, 58, 59], and have been used to monitor post-cardiac event recovery [60]. They have also been widely used for physical activity and sleep monitoring [61, 62, 63], and large-scale deployments show their potential to provide population-level insights into health [64, 65, 66]. Smartglasses represent another commercially available platform for on-body sensing. Prior work has shown that the IMUs embedded in smartglasses can reliably track human motion and activity [67, 68, 69, 70].

The growing diversity of commercially available wearable devices highlights an important design principle: the form factor determines which bodily signals can be captured. Wrist-worn devices are well-suited for gross arm movement, heart rhythms, and activity patterns; head-worn devices capture gaze-related head motion and speech vibrations, and ring-based wearables detect subtle finger motion. These categories align naturally with the control framework described earlier: although EMG and IMU sensors dominate current assistive-robotics research, the form factors determine the type of signal that we are able to obtain from the body, which in turn determines its use as a control interface.

## 3 User-Centric Levels of Control

Recent advances in wearable sensing provide powerful ways to capture users' residual movement and behavior, but sensing alone does not determine how these signals are translated into robot behavior. In assistive robotics, the relationship between user signals and robot action fundamentally shapes what the interaction feels like, how much effort the user expends, and what roles robot and human autonomy play. To situate wearable interfaces within this broader landscape, we organize assisted-robot interaction into three user-centric levels of control: active, shared, and passive. These levels reflect how directly the user drives the robot, how much robot autonomy contributes to execution, and how robot behavior aligns with naturally occurring human cues. Figure 2 visualizes these levels of control along interacting dimensions of direct user actuation, intent inference, and robot autonomy. In the following subsections, we examine each

level, describing how it works, why it matters, and how wearable sensors uniquely support that mode of interaction.

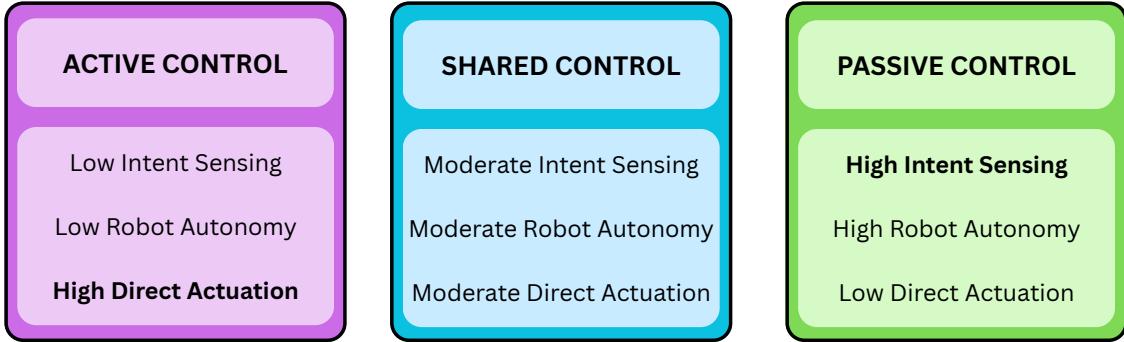

**Figure 2: User-centric control levels positioned along three dimensions: intent sensing, robot autonomy, and direct actuation from the user. Active control requires little to no intent sensing and robot autonomy, with the user performing all of the direct actuation. Shared control blends moderate intent sensing with mid-level robot autonomy, based on the intent sensing, with the user still providing some direct actuation. Passive control relies on high-level intent inference and high robot autonomy, with minimal to no direct actuation from the user.**

### 3.1 Active Control

**Active control refers to where the user’s intentional actions or movements directly trigger robotic movements.**

In assistive robotics, active control has traditionally relied on web-based interfaces [71, 72, 73, 74], hand- or mouth-operated joysticks [75, 76], speech interfaces [77, 78, 79, 80, 81, 82] etc. Although web-based interfaces can be accessed with a standard mouse, many users rely on alternative tools, including head- and eye-tracking [83, 84, 85, 86, 87]. Active control keeps the human unambiguously in the loop for initiation, timing, and direction, properties that are especially important for preference-laden ADLs such as feeding and dressing.

Recent work has increasingly explored wearable interfaces as an alternative interface for active control in assistive tasks. These systems leverage body-worn sensors, most commonly IMUs, EMG armbands, or head-mounted devices, to provide continuous, user-driven control signals for tasks such as feeding, dressing, reaching, and object manipulation. In practice, active control using wearable devices follows a common pipeline. On-body sensors (head IMU, multi-IMU shirt, EMG/HDEMG sleeve) stream continuous signals at tens to hundreds of hertz. These signals are mapped to robot commands either proportionally (e.g., head orientation angles to end-effector velocity) or via classification that triggers the end-effector (e.g., EMG gestures for “drive,” “wrist,” or “grasp”). Finally, a single, reliable input (e.g., clicker or switch) handles mode selection. IMU-based interfaces have been used to map head, wrist, or torso motion to robot end-effector movement, enabling users with limited mobility to teleoperate manipulators with high precision and reduced workspace constraints [50, 51, 52, 53, 46]. EMG-based methods likewise translate muscle activation patterns into control commands, offering hands-free ways for initiating robot motion, selecting modes, or executing multi-DOF trajectories [88, 29]. Across

these systems, wearable active control provides users a direct, personalized means of commanding assistive robots.

Active control offers several advantages to a user. First, it preserves their sense of agency: the user sets the pace, approach, and timing, and can abort instantly, which is critical for tasks that require the robot to operate near the face or body. Second, it supports natural preferences. For example, when feeding, bite size and utensil angle differ from person to person, and sometimes even within individual sessions: active control allows users to make these choices without requiring the system to infer them. However, this level of control comes with costs. Directly operating the robot can place substantial cognitive demands on users, especially when tasks are repetitive, require precise positioning, or involve frequent mode-switching across joints. In these situations, the interaction can become mentally and physically tiring. Many of the sub-steps that users must explicitly manage in active control could be safely abstracted away while still allowing them to guide the essential parts of the task, preserving a sense of control without the full operational burden. These limitations motivate the need for alternatives, such as shared control, that can offload certain demands while still keeping the user directly involved.

## 3.2 Shared Control

**Shared control combines direct user input from direct teleoperation interfaces with the robot’s autonomy, leveraging the robot’s understanding of human intentions and the surrounding environment**

Shared control occupies the middle ground between active and passive control: the user remains intentionally engaged, but the robot contributes autonomous assistance, such as stabilizing motion, enforcing safety, or refining trajectories. In practice, the robot’s autonomy consists of capabilities such as estimating object and human pose, filtering tremor or noise, shaping motion primitives, avoiding collisions, and inferring likely goals. Arbitration, deciding how strongly to weight user inputs versus autonomous proposals, is central to shared control. High arbitration weight on the user gives them more direct influence; higher autonomy weight lets the robot handle low-level execution. Effective systems adjust this balance so that the robot helps without overriding or confusing the user.

In practice, shared control for assistive robotics has been explored across a wide range of tasks and input modalities [44, 89, 90, 91, 92, 93, 94, 95, 96]. Across these systems, the physical form of the input varies, but the high-level pattern is similar: the user guides overall direction, while the shared-control policy autonomously handles the fine-grained decisions that would otherwise be difficult or tedious to perform. Methodologically, much of the shared-control literature focuses on how to implement assistance and arbitration, rather than on the qualitative differences between input modalities. Some of the core questions include how to blend user and robot policies, how to infer the user’s goal, and how to adapt the level of assistance over time [97, 98, 99]. There are a few exceptions that begin to look at interface modality more directly to examine how different input devices might inform assistive autonomy design [100, 101, 102, 103]. However, compared to the substantial body of work on arbitration rules, goal-prediction algorithms, and policy-blending schemes, the form of input is often treated as interchangeable. This gap motivates our focus on wearable interfaces: rather than viewing them as just another input method to plug into an existing shared-control framework, we argue that their specific properties, such as being body-worn and being able to continuously monitor any residual movement, shape how people

experience shared control.

Shared control using wearables would follow a pipeline analogous to that of active-control and wearables but with an autonomy layer inserted between sensing and actuation. Continuous wearable signals are decoded into intent cues such as movement direction, goal likelihood, while perception modules estimate object location, human pose, and environmental constraints. The shared-control system then combines these sources through an arbitration policy, which may blend velocity commands or adjust robot behavior based on confidence. A simple discrete input (e.g., switch, button, vocal cue) can provide confirmation or override, ensuring that autonomy supports the user's intent rather than replacing it.

Shared control offers several advantages to a user. First, it reduces cognitive workload by allowing the robot to handle stabilization, fine alignment, and repetitive sub-steps while the user specifies goals or general motion trends. Second, it improves precision: during tasks such as feeding or dressing, users can issue coarse movements while the robot autonomously filters tremor, shapes trajectories, or adjusts approach angles to be safe and comfortable. Third, shared control lowers the barrier to entry for users with limited motor bandwidth: even small, noisy, or intermittent inputs can be amplified into functional, high-quality assistance. At the same time, shared control carries trade-offs. If the robot's autonomous behaviors are not transparent or predictable, users may feel overridden or confused when trajectories deviate from their input. Systems must therefore carefully balance assistance and user authority, ensuring that autonomy supports rather than conflicts with human intent. While shared control alleviates many of the burdens of full teleoperation, it still relies on users providing deliberate input. This makes it less suitable for tasks where timing is subtle, continuous, or difficult to explicitly signal, motivating the need for passive control.

### 3.3 Passive Control

**Passive control enables robots to detect implicit signals which are small, unintentional signals users give through everyday behavior, such as chewing pauses or shifts in posture, and adjust their behavior accordingly.**

In practice, passive control does not require a user to issue deliberate or continuous commands to the robot; instead, the robot responds to cues that naturally arise from the user's behavior. Importantly, passive control is not equivalent to full autonomy: in fully autonomous systems, the robot independently decides when and how actions should proceed, whereas in passive control, the robot remains tightly coupled to the user's timing. The robot advances only when the user's natural behavior indicates readiness or task progression, making passive control particularly well-suited for activities that depend on subtle timing, or caregiver-like responsiveness.

Passive control offers several advantages. Because the user no longer has to provide inputs, it can substantially reduce both cognitive and physical workload. This makes passive control especially well-suited for long, repetitive, or timing-dependent tasks in which users may not want, or be able, to repeatedly teleoperate. Instead of actively driving the robot, the user's natural behaviors, such as chewing rhythms, brief pauses, posture adjustments, or other unconscious signals, indicate when the robot should proceed. For people with impairments, this ability to remain engaged without supplying explicit input can dramatically improve comfort during extended use.

However, passive control also presents significant challenges. Implicit cues are often subtle,

noisy, or context-dependent, making them harder to interpret than intentional inputs. Systems must avoid both over-sensitivity, which can trigger premature or unwanted actions, and under-sensitivity, which can cause delays or unresponsiveness. Effective passive control, therefore, requires reliable sensing, robust filtering, and careful modeling of user state and task context. These considerations highlight why passive control remains far less explored than active or shared control, despite its strong potential for enabling seamless, caregiver-like interactions.

In assistive robotics, passive control has relied on sensing modalities that infer user intent or user state without explicit commands. For example, gaze fixations [104, 105, 106, 107] have been used to infer desired object targets, body pose or posture shifts [108, 109, 110, 111] can indicate readiness for the next step in dressing, and measurements such as muscle activation trends, or fatigue signatures can modulate robot assistance levels [112]. Traditionally, these signals have been sensed using external perception systems, such as RGB or depth cameras, motion-capture setups, or fixed eye-tracking hardware, that require stable viewpoints and controlled lighting. These setups can be sensitive to occlusion, difficult to deploy in real homes, and often place constraints on where users can be positioned relative to the robot.

This motivates a deeper examination of passive control with wearables since they offer an alternative way to capture similar implicit cues directly from the body while remaining unaffected by some of the problems that vision-based systems face. Most wearable-based systems in assistive robotics have been designed for teleoperation or goal-driven shared control. As a result, the field lacks a clear understanding of how continuous, naturally occurring signals captured unobtrusively from the body might support tasks that users perform every day but do not want to explicitly command. Tasks such as feeding, bathing, or dressing require subtle timing and responsiveness to the user’s state, which are qualities that are difficult for fully autonomous systems to infer and adapt to, and burdensome for users to continuously teleoperate.

Given the sparse amount of existing literature that uses passive control with wearables, we examine an early advancement from our group that uses continuous signals from wearables to infer bite timing during robot-assisted feeding. By evaluating a real wearable-based passive control system in detail, we validate our intuition that combining wearables with implicit sensing can open new opportunities for assistive robots, particularly in tasks that change daily or rely on natural timing.

### 3.3.1 WAFFLE: A Wearable Approach to Bite Timing Estimation in Robot-Assisted Feeding

Bite timing refers to determining the appropriate moment for an assistive feeding robot to deliver food to the user: a decision that, in human caregiving, is based on subtle behavioral cues such as pausing between chews, turning toward the utensil, or briefly stopping conversation.


WAFFLE [113] introduces a wearable, learning-based approach for estimating this timing by detecting these naturally occurring signals without requiring explicit user commands.

WAFFLE uses two unobtrusive wearable sensors: a single IMU mounted on the left side of a glasses frame and a throat contact microphone worn at the neck. The IMU captures head movements and chewing-related vibrations, while the throat microphone detects vocal-cord vibrations from chewing and speaking without recording ambient audio, preserving privacy. Vision-based approaches are vulnerable to occlusions, variable robot pose, user movement, and changes in seating or social-dining configurations, making them unreliable in real-world contexts.

These limitations motivate the use of wearables, which maintain a consistent frame of reference and remain robust across diverse dining environments.

WAFFLE was evaluated in two main studies. In the first study, fifteen participants without motor impairments (referred to in subsequent sections as P1-15) completed individual and social dining sessions using three bite-timing methods: Fixed Interval, Mouth Open, and WAFFLE, while being fed by the Obi [114] robot positioned to the side. Participants completed three consecutive trials per method, with method order being single-blind. After each method, participants rated timing appropriateness and responded to 7-point Likert items assessing distraction by the robot, feeling of control, robot understanding, appropriateness of robot movement, seamlessness, mental workload, physical workload, and natural conversation. In the second study, two participants with motor impairments (referred to in subsequent sections as I1-2) used WAFFLE in their homes with the FEAST robot, selecting their preferred assertiveness threshold before completing individual and social dining sessions.

Across these evaluations, WAFFLE either matched or outperformed baseline methods. In individual dining, 100% of participants found WAFFLE's timing appropriate, and it received the most "Right Time" ratings. It also produced lower cognitive and physical workload and matched ratings for robot understanding and seamlessness with non-wearable methods despite relying on implicit cues. In social dining, WAFFLE matched or exceeded baselines, particularly on distraction and natural conversation, where explicit triggers like mouth opening were disruptive. In the study with individuals with motor impairments, both participants rated WAFFLE's timing as appropriate and described the interaction as natural, intuitive, and comparable to, or even better than, their human caregivers. Collectively, the results show that WAFFLE generalizes across robots, participants, foods, and dining contexts, providing robust bite-timing.

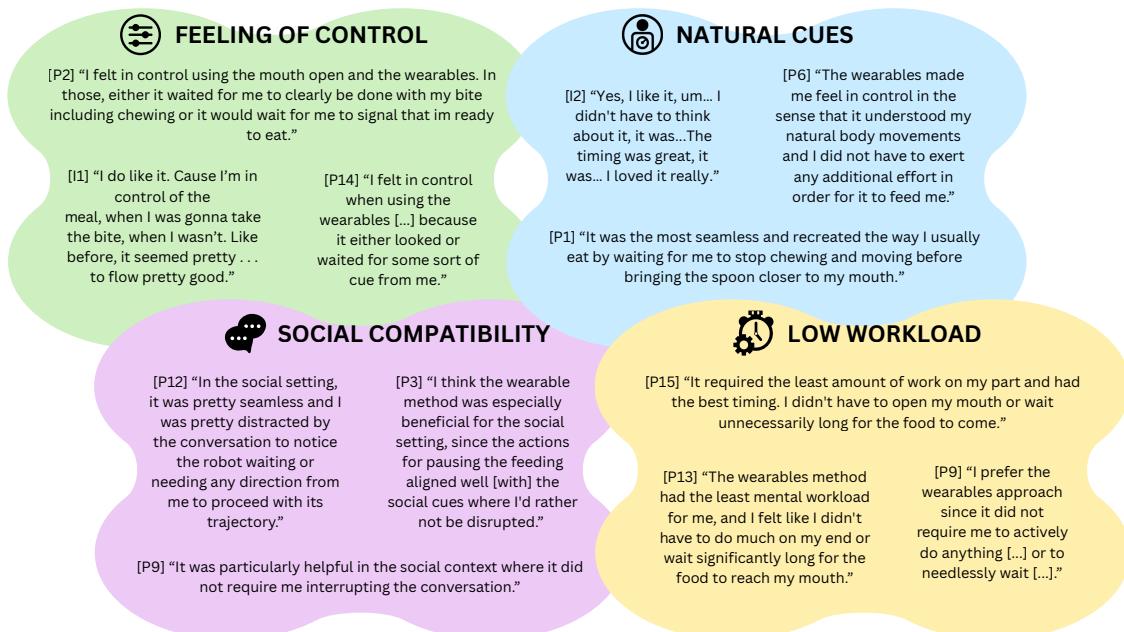

**Figure 3: A subset of quotes from our study involving 15 participants without motor impairments and 2 participants with motor impairments is presented and organized according to the categories outlined in our thematic analysis.**

### 3.3.2 Thematic Analysis

In addition to Likert items, we asked participants some open-ended questions during our study. Consequently, we conducted a thematic analysis of these participant responses, focusing on the wearable sensing method for assistive feeding. The analysis identified four core themes: namely (1) feeling of control, (2) natural cues, (3) social compatibility, and (4) low workload that capture how users perceived the experience of being fed through wearable-based passive sensing methods.

#### 3.3.2.1 Feeling of Control

Across the study, 9 of 15 participants without impairments and both participants with motor impairments described the wearable method as giving them a strong sense of control over the feeding process. Rather than issuing explicit commands or relying on a fixed timing cycle, they felt that the robot advanced when they were ready, framing control not as performing a deliberate gesture, but as the robot understanding their intentions. As I1 explained, “I do like it. Cause I’m in control of the meal, when I was gonna take the bite, when I wasn’t. Like before, it seemed pretty . . . it seemed to flow pretty good.” The ability to pause simply by continuing to chew or by stopping briefly made the interaction feel natural and unforced. I1 also noted that the robot stopped reliably: “Yes. It stopped when I wanted to.” Participants without impairments expressed similar sentiments. P2 said the wearables matched their own timing: “it waited for me to clearly be done. . . . so I didn’t feel rushed or frustrated with slowness”, and P14 appreciated that the robot “waited for some sort of cue from me.” For many, the fact that the system responded to ongoing behavior allowed them to engage in conversation or look around the room while still feeling in control.

However, 5 participants felt more in control with the mouth-open (baseline) method because its explicit cue provided a clear, intentional signal. As P3 described, “it relied on an explicit cue [ . . . ] the wearables came second in this regard.” P5 expressed a similar concern, noting that if they wanted to delay a bite using the wearable method, they had to improvise, saying, “I needed to come up with something that will pause the arm from coming in like talking or chewing.” Others mentioned technical or behavioral mismatches. P12 noted that the wearable devices did not always detect ongoing chewing, and P11 felt constrained by needing to remain “unnaturally still.”

Overall, these responses show that wearable-based passive control can support a strong sense of agency for many users, particularly those who value timing that adapts to their natural eating pace. But they also highlight that some users prefer explicit, intentional cues to guarantee control. The diversity of reactions underscores that the concept of feeling of control is shaped not just by whether users can stop or start the robot, but by whether the signaling mechanism aligns with their preferred way of communicating readiness.

#### 3.3.2.2 Natural Cues

9 of the 15 participants without impairments and 1 of 2 participants with impairments described the wearable method as the most natural way for the robot to determine bite timing. Participants noted that the system responded to signals they were already producing, such as chewing, pausing, or briefly stopping conversation, rather than requiring them to perform an explicit gesture. For the participant with impairments who strongly preferred the wearable devices, the appeal lay in not needing to interrupt their flow of activity: “I didn’t have to think

about it . . . I didn't have to stop what I was doing and do a specific action." They later added that the timing felt effortless: "It was almost seamless . . . I loved it really."

Several participants without impairments echoed this sentiment, highlighting that the wearable devices aligned with how they would naturally pace their own eating. P1 described the method as "the most seamless" because it simply waited for chewing or talking to stop before bringing in the next bite. Others emphasized how the system adjusted: P3 noted that its awareness of chewing created "natural brakes," and P2 appreciated that the timing adapted when they wanted to take longer between signals. Participants also said that the wearable devices made the robot feel more responsive to their body rather than forcing them into a fixed pattern. P6 summarized this as the robot understanding "my natural body movements," and P5 remarked that the system "adjust[ed] to the environment . . . like a person would."

Not every participant experienced the interaction this way. Three participants preferred the predictability or explicitness of the other methods. P8 valued the fixed schedule for planning conversation, and P11 found the wearable devices "annoying" because staying still felt unnatural. A few participants expressed concerns about occasional misdetections. P12 pointed out that the system "sometimes didn't pick up on the fact that I was still chewing." These reactions show that while the wearables generally supported a natural-feeling interaction, the experience depended on how well the sensing aligned with each person's eating style and comfort.

Overall, participants who favored the wearable approach described it not as performing a special signal but as the robot picking up on cues they were already giving. This sense of the robot adapting to their ordinary behavior, without demanding a separate action, was central to why many found the method intuitive and unobtrusive.

### 3.3.2.3 Social Compatibility

In the social dining setting, 4 of 15 participants without impairments and 1 of 2 participants with impairments described the wearable method as the least disruptive to conversation. Many appreciated that the robot paused naturally when they were speaking and resumed only when their behavior indicated readiness. The participant with impairments emphasized this directly, noting that the wearable devices let them "have a conversation and eat at the same time." For several others, the appeal came from not needing to stop mid-sentence or perform a visible cue. P9 explained that the method "did not require me interrupting the conversation," and P3 felt it aligned with social norms, saying the wearable cues matched the moments when they "would rather not be disrupted."

Participants also highlighted that the system's responses blended into the flow of interactions. One participant noted that during social dining, the method was "pretty seamless," adding that they were often so absorbed in conversation they barely noticed the robot waiting in the background. P15 described a similar experience, appreciating that the robot stayed still during conversation and only moved forward once they stopped talking: "I could continue having a conversation . . . it wouldn't make the conversation awkward." They contrasted this with mouth-open and fixed-interval timing, both of which forced them to break conversational rhythm. Only one participant (P7) found it "slightly distracting" during conversation, though still preferable to the other methods.

Overall, we see that participants favored the wearable method because it respected conversational timing rather than interrupting it, allowing users to engage socially without having

to manage the robot's behavior moment-to-moment.

### 3.3.2.4 Low Workload

6 of the 15 participants without impairments emphasized that they did not need to think about signaling for the next bite or interrupt their eating to perform an explicit cue. As P2 explained, the wearable devices demanded “the least amount of thinking,” both because it waited for them to finish chewing and because they no longer had to decide when to signal. Several participants echoed that the method reduced the small decisions present in the other interfaces. Participants also noted that the wearable system did not introduce additional actions into the eating process. Instead, it responded to behaviors they were already producing. P9 preferred the wearable devices because it “did not require me to actively do anything,” distinguishing it from mouth-open cues that required repeated, deliberate gestures. Similarly, P13 emphasized that they “didn’t have to perform the action of opening my mouth for every bite” and described the method as having the “least mental workload.”

Overall, participants who favored the wearable method described it as needing low workload because it eliminated having to provide explicit actions, allowing them to focus on eating or conversation without managing the robot’s timing.

### 3.3.3 Reflection

Overall, these themes offer insight into what passive control with wearable devices could potentially afford users that are not captured by timing metrics or Likert scores alone. The qualitative responses show that participants valued the system not simply because it succeeded at predicting bite timing, but because it did so in a way that aligned with how they naturally behaved. Themes of feeling of control, natural cues, low workload, and social compatibility emerged repeatedly, suggesting that passive sensing is most successful when it fades into the background and responds to ongoing behavior rather than demanding additional effort or attention. These findings help articulate why wearable devices are a promising platform for passive control: their ability to capture subtle, continuous signals from the human body allows assistive robots to adapt to users without requiring explicit commands or constraining where they sit, look, or move. The thematic analysis, therefore, broadens our understanding of passive control. This user-centered perspective helps clarify where passive wearable sensing is most likely to succeed, where it may fall short, and why it offers a distinct design space from both explicit teleoperation and fully autonomous decision-making.

## 4 Future Work and Opportunities

While this thesis examined one system using wearable-based passive control in robot-assisted feeding, the broader intersection of wearable sensing and passive control presents several compelling avenues for future exploration. Passive control remains an emerging mode of interaction, and many of its strengths, such as low workload, natural timing, and user-driven responsiveness, have yet to be fully leveraged across the wide landscape of assistive tasks.

A natural next step is to extend passive wearable sensing beyond feeding to additional Activities of Daily Living (ADLs) and Instrumental Activities of Daily Living (iADLs). Many

everyday tasks contain subtle behavioral cues: pauses, shifts in posture, changes in muscle activity that could similarly serve as implicit signals of readiness or intent. Promising applications include:

- Dressing assistance, where micro-movements of the arms, shoulders, or torso could indicate readiness for garment transitions or the next step in the dressing sequence.
- Functional tasks around the home, where posture adjustments might indicate when users are ready for objects to be brought closer, or repositioned.
- Grooming and hygiene, where stillness, brief pauses, or subtle head orientation changes could signal readiness for brushing, shaving, or facial care.

Longitudinal adaptation represents another key opportunity. Wearable-based passive control may be particularly effective when systems learn from continued daily use: adapting to changes in motor ability, personalizing inference thresholds, or refining models of movement patterns unique to each user. Developing passive-control systems that evolve with the user over weeks or months could dramatically increase reliability and comfort while reducing the need for recalibration. Additionally, real-world deployment remains a crucial challenge. Future work should explore how passive wearable control performs in diverse home environments, social dining settings, or public spaces where lighting, clutter, and movement vary unpredictably. Testing systems over extended durations will also help uncover practical considerations such as sensor drift, comfort, durability, etc., that are essential for adoption.

Future work may also explore additional wearable modalities that extend beyond IMUs and EMG. Physiological sensors such as PPG or skin conductance may reveal stress and discomfort bone and emerging smart textiles could capture distributed body movements that traditional sensors miss. Combining these signals through multimodal sensor fusion could increase robustness, especially in unpredictable home environments.

Another promising direction involves expanding the proposed framework itself. Although this thesis characterizes control along three levels from the perspective of the user, future research could position these levels within a richer multidimensional design space. Axes such as robot autonomy versus user actuation may allow researchers to reason more precisely about when certain wearable modalities are appropriate or how systems should adjust autonomy over time. Extending the framework in this manner could help researchers tailor interactions to individual users, specific tasks, or different abilities.

## 5 Conclusion

This thesis presents a user-centric framework for understanding control in assistive robotics from the user's perspective and examines how wearable sensing can support three distinct levels of control: active, shared, and passive. Through a review of prior work, we show that wearable devices, particularly EMG and IMU sensors, are uniquely positioned to provide reliable, personalized input in contexts where traditional interfaces may fall short. While active and shared wearable-based control have been explored extensively, passive control remains comparatively underutilized.

Our thematic analysis of a wearable-based bite-timing system illustrates that passive control using wearable sensing can provide meaningful benefits, including strong feelings of control, natural pacing, reduced cognitive effort, and improved social interaction. These findings highlight passive wearable sensing as a promising direction for enabling assistive robots to behave in ways that feel intuitive, non-disruptive, and aligned with users' everyday behavior.

Ultimately, this work suggests that wearable devices will likely play an important role in the future of user-centered assistive robotics. By coupling on-body sensing with models of human behavior, assistive robots can become more adaptive, responsive, and seamlessly integrated into the daily lives of people with motor impairments. Continued exploration of passive sensing modalities, richer autonomy frameworks, and long-term personalization will help unlock the full potential of wearables as interfaces for supporting independence and quality of life.

## References

- [1] Brian S Armour, Elizabeth A Courtney-Long, Michael H Fox, Heidi Fredine, and Anthony Cahill. Prevalence and causes of paralysis—united states, 2013. *American journal of public health*, 106(10):1855–1857, 2016.
- [2] Marcel PJM Dijkers. Quality of life of individuals with spinal cord injury: a review of conceptualization, measurement, and research findings. *Journal of rehabilitation research and development*, 42(3):87, 2005.
- [3] Bo Fernhall, Kevin Heffernan, Sae Young Jae, and Brad Hedrick. Health implications of physical activity in individuals with spinal cord injury: a literature review. *Journal of health and human services administration*, 30(4):468–502, 2008.
- [4] Louise Mercier, Thérèse Audet, Réjean Hébert, Annie Rochette, and Marie-France Dubois. Impact of motor, cognitive, and perceptual disorders on ability to perform activities of daily living after stroke. *Stroke*, 32(11):2602–2608, 2001.
- [5] Brodie M Sakakibara, William C Miller, Steven G Orenzuk, and Dalton L Wolfe. A systematic review of depression and anxiety measures used with individuals with spinal cord injury. *Spinal cord*, 47(12):841–851, 2009.
- [6] Lina Bunketorp Käll, Johanna Wangdell, and Carina Reinholdt. Surgical restoration of hand function in tetraplegia. *Spinal Cord Series and Cases*, 7(1):22, 2021.
- [7] Jennifer L Collinger, Brian Wodlinger, John E Downey, Wei Wang, Elizabeth C Tyler-Kabara, Douglas J Weber, Angus JC McMorland, Meel Velliste, Michael L Boninger, and Andrew B Schwartz. High-performance neuroprosthetic control by an individual with tetraplegia. *The Lancet*, 381(9866):557–564, 2013.
- [8] Pablo Maceira-Elvira, Traian Popa, Anne-Christine Schmid, and Friedhelm C Hummel. Wearable technology in stroke rehabilitation: towards improved diagnosis and treatment of upper-limb motor impairment. *Journal of neuroengineering and rehabilitation*, 16(1):142, 2019.

- [9] Bethel A Osuagwu, Sarah Timms, Ruth Peachment, Sarah Dowie, Helen Thrussell, Susan Cross, Tony Heywood, Rebecca Shirley, and Julian Taylor. Clinical trial of the soft extra muscle glove to assess orthotic and long-term functional gain following chronic incomplete tetraplegia: Preliminary functional results. In *International Conference on NeuroRehabilitation*, pages 385–389. Springer, 2018.
- [10] Jongsang Son, Jan Fridén, and Richard L Lieber. Biomechanical modeling of brachialis-to-wrist extensor muscle transfer function for daily activities in tetraplegia. *JBJS Open Access*, 7(3):e22, 2022.
- [11] Xing Chen and James Davis. Camera placement considering occlusion for robust motion capture. *Computer Graphics Laboratory, Stanford University, Tech. Rep*, 2(2.2):2, 2000.
- [12] Pushkar Kadam, Gu Fang, and Ju Jia Zou. Object tracking using computer vision: A review. *Computers*, 13(6):136, 2024.
- [13] Yuzuka Isobe, Gakuto Masuyama, and Kazunori Umeda. Occlusion handling for a target-tracking robot with a stereo camera. *Robomech Journal*, 5(1):4, 2018.
- [14] Yi Chiew Han, Kiing Ing Wong, and Iain Murray. Gait phase detection for normal and abnormal gaits using imu. *IEEE Sensors Journal*, 19(9):3439–3448, 2019.
- [15] Mohamed R Al-Mulla and Francisco Sepulveda. Novel feature modelling the prediction and detection of semg muscle fatigue towards an automated wearable system. *Sensors*, 10(5):4838–4854, 2010.
- [16] Gregg D Meekins, Yuen So, and Dianna Quan. American association of neuromuscular & electrodiagnostic medicine evidenced-based review: use of surface electromyography in the diagnosis and study of neuromuscular disorders. *Muscle & Nerve: Official Journal of the American Association of Electrodiagnostic Medicine*, 38(4):1219–1224, 2008.
- [17] Annemarie Laudanski, Brenda Brouwer, and Qingguo Li. Measurement of lower limb joint kinematics using inertial sensors during stair ascent and descent in healthy older adults and stroke survivors. *Journal of healthcare engineering*, 4(4):555–576, 2013.
- [18] Jean-Yves Hogrel. Clinical applications of surface electromyography in neuromuscular disorders. *Neurophysiologie Clinique/Clinical Neurophysiology*, 35(2-3):59–71, 2005.
- [19] Omid Dehzangi, Mojtaba Taherisadr, and Raghvendar ChangalVala. Imu-based gait recognition using convolutional neural networks and multi-sensor fusion. *Sensors*, 17(12):2735, 2017.
- [20] Bernd Grimm and Stijn Bolink. Evaluating physical function and activity in the elderly patient using wearable motion sensors. *EFORT open reviews*, 1(5):112–120, 2016.
- [21] Henry J Woodford and Christopher IM Price. Emg biofeedback for the recovery of motor function after stroke. *Cochrane Database of Systematic Reviews*, (2), 2007.

- [22] Roberto Merletti and Dario Farina. *Surface electromyography: physiology, engineering, and applications*. John Wiley & Sons, 2016.
- [23] Shing-Hong Liu, Chuan-Bi Lin, Ying Chen, Wenxi Chen, Tai-Shen Huang, and Chi-Yueh Hsu. An emg patch for the real-time monitoring of muscle-fatigue conditions during exercise. *Sensors*, 19(14):3108, 2019.
- [24] Kang-Ming Chang, Shin-Hong Liu, and Xuan-Han Wu. A wireless semg recording system and its application to muscle fatigue detection. *Sensors*, 12(1):489–499, 2012.
- [25] Nawadita Parajuli, Neethu Sreenivasan, Paolo Bifulco, Mario Cesarelli, Sergio Savino, Vincenzo Niola, Daniele Esposito, Tara J Hamilton, Ganesh R Naik, Upul Gunawardana, et al. Real-time emg based pattern recognition control for hand prostheses: A review on existing methods, challenges and future implementation. *Sensors*, 19(20):4596, 2019.
- [26] Drishti Yadav and Karan Veer. Recent trends and challenges of surface electromyography in prosthetic applications. *Biomedical Engineering Letters*, 13(3):353–373, 2023.
- [27] Anany Dwivedi, Jaime Lara, Leo K Cheng, Niranchan Paskaranandavadivel, and Minas Liarokapis. High-density electromyography based control of robotic devices: On the execution of dexterous manipulation tasks. In *2020 IEEE International Conference on Robotics and Automation (ICRA)*, pages 3825–3831. IEEE, 2020.
- [28] Mark Ison, Ivan Vujaklija, Bryan Whitsell, Dario Farina, and Panagiotis Artermiadis. High-density electromyography and motor skill learning for robust long-term control of a 7-dof robot arm. *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, 24(4):424–433, 2015.
- [29] Jehan Yang, Kent Shibata, Douglas Weber, and Zackory Erickson. High-density electromyography for effective gesture-based control of physically assistive mobile manipulators. *npj Robotics*, 3(1):2, 2025.
- [30] Jehan Yang, Kent Shibata, Douglas Weber, and Zackory Erickson. High-density electromyography for effective gesture-based control of physically assistive mobile manipulators. *arXiv preprint arXiv:2312.07745*, 2023.
- [31] Annette Hagengruber, Gabriel Quere, Maged Iskandar, Samuel Bustamante, Jianxiang Feng, Daniel Leidner, Alin Albu-Schäffer, Freek Stulp, and Jörn Vogel. An assistive robot that enables people with amyotrophy to perform sequences of everyday activities. *Scientific Reports*, 15(1):8426, 2025.
- [32] Stefano Bisi, Luca De Luca, Bikash Shrestha, Zhijun Yang, and Vaibhav Gandhi. Development of an emg-controlled mobile robot. *Robotics*, 7(3):36, 2018.
- [33] Xinjie Wang, Wei Bai, Huadong Zheng, Caidong Wang, Benjie Wu, and Longxiang Han. Design of mobile robot control system based on emg signal. In *2022 5th International Conference on Intelligent Autonomous Systems (ICoIAS)*, pages 202–208. IEEE, 2022.

- [34] Robbin Romijnders, Elke Warmerdam, Clint Hansen, Julius Welzel, Gerhard Schmidt, and Walter Maetzler. Validation of imu-based gait event detection during curved walking and turning in older adults and parkinson's disease patients. *Journal of neuroengineering and rehabilitation*, 18(1):28, 2021.
- [35] Anastasios Petropoulos, Dimitrios Sikeridis, and Theodore Antonakopoulos. Spomo: Imu-based real-time sitting posture monitoring. In *2017 IEEE 7th International Conference on Consumer Electronics-Berlin (ICCE-Berlin)*, pages 5–9. IEEE, 2017.
- [36] Timo Von Marcard, Gerard Pons-Moll, and Bodo Rosenhahn. Human pose estimation from video and imus. *IEEE transactions on pattern analysis and machine intelligence*, 38(8):1533–1547, 2016.
- [37] Gaspare Santaera, Emanuele Luberto, Alessandro Serio, Marco Gabiccini, and Antonio Bicchi. Low-cost, fast and accurate reconstruction of robotic and human postures via imu measurements. In *2015 IEEE International Conference on Robotics and Automation (ICRA)*, pages 2728–2735. IEEE, 2015.
- [38] Mohammed M Hamdi, Mohammed I Awad, Magdy M Abdelhameed, and Farid A Tolbah. Lower limb motion tracking using imu sensor network. In *2014 Cairo International Biomedical Engineering Conference (CIBEC)*, pages 28–33. IEEE, 2014.
- [39] Ou Bai, Roozbeh Atri, Juan S Marquez, and Ding-Yu Fei. Characterization of lower limb activity during gait using wearable, multi-channel surface emg and imu sensors. In *2017 International Electrical Engineering Congress (iEECON)*, pages 1–4. IEEE, 2017.
- [40] Thibault Marsan, Sacha Clauzade, Xiang Zhang, Nicolas Grandin, Tatiana Urman, Evan Linton, Ingy Elsayed-Aly, Catherine E Ricciardi, and Robin Temporelli. Reev sense imus for gait analysis in stroke: A clinical study on lower limb kinematics. *Sensors*, 25(16):5123, 2025.
- [41] Subok Kim, Seoho Park, and Onseok Lee. Development of a diagnosis and evaluation system for hemiplegic patients post-stroke based on motion recognition tracking and analysis of wrist joint kinematics. *Sensors*, 20(16):4548, 2020.
- [42] Fabian Marcel Rast and Rob Labryère. Systematic review on the application of wearable inertial sensors to quantify everyday life motor activity in people with mobility impairments. *Journal of neuroengineering and rehabilitation*, 17(1):148, 2020.
- [43] Elsa Davis, Mithran Periassamy, Braden Stock, Peter Altenburger, Satyajit Ambike, and Jeffrey Haddad. Using inertial measurement units (imus) to detect mobility declines in middle-aged individuals. *Innovation in Aging*, 7(Supplement\_1):671–671, 2023.
- [44] Akhil Padmanabha, Janavi Gupta, Chen Chen, Jehan Yang, Vy Nguyen, Douglas J Weber, Carmel Majidi, and Zackory Erickson. Independence in the home: A wearable interface for a person with quadriplegia to teleoperate a mobile manipulator. In *Proceedings of the 2024 ACM/IEEE International Conference on Human-Robot Interaction*, pages 542–551, 2024.

- [45] Haegyeom Choi, Haneul Jeon, Donghyeon Noh, Taeho Kim, and Donghun Lee. Hand-guiding gesture-based telemanipulation with the gesture mode classification and state estimation using wearable imu sensors. *Mathematics*, 11(16):3514, 2023.
- [46] Akhil Padmanabha, Qin Wang, Daphne Han, Jashkumar Diyora, Kriti Kacker, Hamza Khalid, Liang-Jung Chen, Carmel Majidi, and Zackory Erickson. Hat: Head-worn assistive teleoperation of mobile manipulators. In *2023 IEEE International Conference on Robotics and Automation (ICRA)*, pages 12542–12548. IEEE, 2023.
- [47] Yusuke Hirao, Weiwei Wan, Dimitrios Kanoulas, and Kensuke Harada. Body extension by using two mobile manipulators. *Cyborg and Bionic Systems*, 4:0014, 2023.
- [48] Yugen You, Zhun Fan, Wenzhao Chen, Guijie Zhu, Benzhang Qiu, Jiaming Xin, Jingming Chen, Furong Deng, Youzhao Hou, Weixiang Liang, et al. Design and implementation of mobile manipulator system. In *2019 IEEE 9th Annual International Conference on CYBER Technology in Automation, Control, and Intelligent Systems (CYBER)*, pages 113–118. IEEE, 2019.
- [49] Li Qian, Wu Hao, and Wang Peng. Manipulator trajectory planning and control method based on imu. In *Proceedings of the 2018 International Conference on Robotics, Control and Automation Engineering*, pages 132–136, 2018.
- [50] Karlos Ishac and Kenji Suzuki. Gesture based robotic arm control for meal time care using a wearable sensory jacket. In *2016 IEEE International Symposium on Robotics and Intelligent Sensors (IRIS)*, pages 122–127. IEEE, 2016.
- [51] Shuwei Guo, Cong Yang, Zhizhong Su, Wei Sui, Xun Liu, Minglu Zhu, and Tao Chen. From human-computer interaction to human-robot manipulation. *Engineering Proceedings*, 110(1):1, 2025.
- [52] Anja Jackowski, Marion Gebhard, and Roland Thietje. Head motion and head gesture-based robot control: A usability study. *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, 26(1):161–170, 2017.
- [53] Elias Karner, Brian Butka, and Christopher Hockley. Realtime imu based gesture recognition for assistive robots.
- [54] Marco V Perez, Kenneth W Mahaffey, Haley Hedlin, John S Rumsfeld, Ariadna Garcia, Todd Ferris, Vidhya Balasubramanian, Andrea M Russo, Amol Rajmane, Lauren Cheung, et al. Large-scale assessment of a smartwatch to identify atrial fibrillation. *New England Journal of Medicine*, 381(20):1909–1917, 2019.
- [55] Geoffrey H Tison, José M Sanchez, Brandon Ballinger, Avesh Singh, Jeffrey E Olglin, Mark J Pletcher, Eric Vittinghoff, Emily S Lee, Shannon M Fan, Rachel A Gladstone, et al. Passive detection of atrial fibrillation using a commercially available smartwatch. *JAMA cardiology*, 3(5):409–416, 2018.

- [56] Eric Y Ding, Khanh-Van Tran, Darleen Lessard, Ziyue Wang, Dong Han, Fahimeh Mohagheghian, Edith Mensah Otabil, Kamran Noorishirazi, Jordy Mehawej, Andreas Filippaios, et al. Accuracy, usability, and adherence of smartwatches for atrial fibrillation detection in older adults after stroke: randomized controlled trial. *JMIR cardio*, 7(1):e45137, 2023.
- [57] Kuang-Yen Tai, Dai-Lun Chiang, Tzer-Shyong Chen, Victor RL Shen, Feipei Lai, and Frank Yeong-Sung Lin. Smart fall prediction for elderly care using iphone and apple watch. *Wireless Personal Communications*, 114(1):347–365, 2020.
- [58] Libak Abou, Alexander Fliflet, Lina Hawari, Peter Presti, Jacob J Sosnoff, Harshal P Mahajan, Mikaela L Frechette, and Laura A Rice. Sensitivity of apple watch fall detection feature among wheelchair users. *Assistive technology*, 34(5):619–625, 2022.
- [59] Francisco Javier González-Cañete and Eduardo Casilari. A feasibility study of the use of smartwatches in wearable fall detection systems. *Sensors*, 21(6):2254, 2021.
- [60] Mintu P Turakhia, Manisha Desai, Haley Hedlin, Amol Rajmane, Nisha Talati, Todd Ferris, Sumbul Desai, Divya Nag, Mithun Patel, Peter Kowey, et al. Rationale and design of a large-scale, app-based study to identify cardiac arrhythmias using a smartwatch: The apple heart study. *American heart journal*, 207:66–75, 2019.
- [61] Kelly R Evenson, Michelle M Goto, and Robert D Furberg. Systematic review of the validity and reliability of consumer-wearable activity trackers. *International Journal of Behavioral Nutrition and Physical Activity*, 12(1):159, 2015.
- [62] Simone Benedetto, Christian Caldato, Elia Bazzan, Darren C Greenwood, Virginia Pensabene, and Paolo Actis. Assessment of the fitbit charge 2 for monitoring heart rate. *PloS one*, 13(2):e0192691, 2018.
- [63] Sarah F Roberts-Lewis, Claire M White, Mark Ashworth, and Michael R Rose. Validity of fitbit activity monitoring for adults with progressive muscle diseases. *Disability and Rehabilitation*, 44(24):7543–7553, 2022.
- [64] Jennifer M Radin, Nathan E Wineinger, Eric J Topol, and Steven R Steinhubl. Harnessing wearable device data to improve state-level real-time surveillance of influenza-like illness in the usa: a population-based study. *The Lancet Digital Health*, 2(2):e85–e93, 2020.
- [65] Kan Yamagami, Akihiro Nomura, Mitsuhiro Kometani, Masaya Shimojima, Kenji Sakata, Soichiro Usui, Kenji Furukawa, Masayuki Takamura, Masaki Okajima, Kazuyoshi Watanabe, et al. Early detection of symptom exacerbation in patients with sars-cov-2 infection using the fitbit charge 3 (dexterity): pilot evaluation. *JMIR Formative Research*, 5(9):e30819, 2021.
- [66] Mayowa Emmanuel. Wearables for early detection of infectious diseases. 2024.
- [67] Sakorn Mekruksavanich, Ponnipa Jantawong, and Anuchit Jitpattanakul. Deep learning approaches for har of daily living activities using imu sensors in smart glasses. In 2023

*Joint International Conference on Digital Arts, Media and Technology with ECTI Northern Section Conference on Electrical, Electronics, Computer and Telecommunications Engineering (ECTI DAMT & NCON)*, pages 474–478. IEEE, 2023.

- [68] Johannes Meyer, Adrian Frank, Thomas Schlebusch, and Enkeljeda Kasneci. A cnn-based human activity recognition system combining a laser feedback interferometry eye movement sensor and an imu for context-aware smart glasses. *Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies*, 5(4):1–24, 2021.
- [69] Justine Hellec, Frédéric Chorin, Andrea Castagnetti, and Serge S Colson. Sit-to-stand movement evaluated using an inertial measurement unit embedded in smart glasses—a validation study. *Sensors*, 20(18):5019, 2020.
- [70] Xavier Borah, A Thangam, and Neelam Kumari. Smart glasses with sensors. In *Handbook of Artificial Intelligence and Wearables*, pages 236–245. CRC Press, 2024.
- [71] Tiffany L Chen, Matei Ciocarlie, Steve Cousins, Phillip M Grice, Kelsey Hawkins, Kaijen Hsiao, Charles C Kemp, Chih-Hung King, Daniel A Lazewatsky, Adam E Leeper, et al. Robots for humanity: using assistive robotics to empower people with disabilities. *IEEE Robotics & Automation Magazine*, 20(1):30–39, 2013.
- [72] Phillip M. Grice and Charles C. Kemp. In-home and remote use of robotic body surrogates by people with profound motor deficits. *PLOS ONE*, 14(3), 2019.
- [73] Maria E Cabrera, Tapomayukh Bhattacharjee, Kavi Dey, and Maya Cakmak. An exploration of accessible remote tele-operation for assistive mobile manipulators in the home. In *2021 30th IEEE International Conference on Robot & Human Interactive Communication (RO-MAN)*, pages 1202–1209. IEEE, 2021.
- [74] Vinita Ranganeni, Noah Ponto, and Maya Cakmak. Evaluating customization of remote tele-operation interfaces for assistive robots. *arXiv preprint arXiv:2304.02771*, 2023.
- [75] Linda Fehr, W Edwin Langbein, and Steven B Skaar. Adequacy of power wheelchair control interfaces for persons with severe disabilities: A clinical survey. *Journal of rehabilitation research and development*, 37(3):353–360, 2000.
- [76] Mariella Pazzaglia and Marco Molinari. The embodiment of assistive devices—from wheelchair to exoskeleton. *Physics of life reviews*, 16:163–175, 2016.
- [77] Akhil Padmanabha, Jessie Yuan, Janavi Gupta, Zulekha Karachiwalla, Carmel Majidi, Henny Admoni, and Zackory Erickson. Voicepilot: Harnessing llms as speech interfaces for physically assistive robots. *arXiv preprint arXiv:2404.04066*, 2024.
- [78] Jessie Yuan, Janavi Gupta, Akhil Padmanabha, Zulekha Karachiwalla, Carmel Majidi, Henny Admoni, and Zackory Erickson. Towards an llm-based speech interface for robot-assisted feeding. In *Adjunct Proceedings of the 37th Annual ACM Symposium on User Interface Software and Technology*, pages 1–4, 2024.

- [79] Shafkat Kibria. Speech recognition for robotic control. *Master's Thesis in Computing Science, Umea University*, pages 1–77, 2005.
- [80] Rainer Stiefelhagen, Christian Fugen, R Gieselmann, Hartwig Holzapfel, Kai Nickel, and Alex Waibel. Natural human-robot interaction using speech, head pose and gestures. In *2004 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)(IEEE Cat. No. 04CH37566)*, volume 3, pages 2422–2427. IEEE, 2004.
- [81] Brandi House, Jonathan Malkin, and Jeff Bilmes. The voicebot: a voice controlled robot arm. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*, pages 183–192, 2009.
- [82] Oliver Rogalla, Markus Ehrenmann, R Zollner, Regine Becher, and Rüdiger Dillmann. Using gesture and speech control for commanding a robot assistant. In *Proceedings. 11th IEEE International Workshop on Robot and Human Interactive Communication*, pages 454–459. IEEE, 2002.
- [83] Margrit Betke, James Gips, and Peter Fleming. The camera mouse: visual tracking of body features to provide computer access for people with severe disabilities. *IEEE Transactions on neural systems and Rehabilitation Engineering*, 10(1):1–10, 2002.
- [84] Kelly Tai, Stefanie Blain, and Tom Chau. A review of emerging access technologies for individuals with severe motor impairments. *Assistive technology*, 20(4):204–221, 2008.
- [85] Emanuele Perini, Simone Soria, Andrea Prati, and Rita Cucchiara. Facemouse: A human-computer interface for tetraplegic people. In *European Conference on Computer Vision*, pages 99–108. Springer, 2006.
- [86] Robert JK Jacob. Eye tracking in advanced interface design. *Virtual environments and advanced interface design*, 258:288, 1995.
- [87] Arie E Kaufman, Amit Bandopadhyay, and Bernard D Shaviv. An eye tracking computer user interface. In *Proceedings of 1993 IEEE Research Properties in Virtual Reality Symposium*, pages 120–121. IEEE, 1993.
- [88] Osamu Fukuda, Toshio Tsuji, Akira Ohtsuka, and Makoto Kaneko. Emg-based human-robot interface for rehabilitation aid. In *Proceedings. 1998 IEEE International Conference on Robotics and Automation (Cat. No. 98CH36146)*, volume 4, pages 3492–3497. IEEE, 1998.
- [89] Siddarth Jain and Brenna Argall. Probabilistic human intent recognition for shared autonomy in assistive robotics. *ACM Transactions on Human-Robot Interaction (THRI)*, 9(1):1–23, 2019.
- [90] Reuben M Aronson and Henny Admoni. Gaze complements control input for goal prediction during assisted teleoperation. In *Robotics science and systems*, 2022.
- [91] Henny Admoni and Siddhartha S Srinivasa. Predicting user intent through eye gaze for shared autonomy. In *AAAI fall symposia*, pages 298–303, 2016.

- [92] Zackory Erickson, Henry M Clever, Greg Turk, C Karen Liu, and Charles C Kemp. Deep haptic model predictive control for robot-assisted dressing. In *2018 IEEE international conference on robotics and automation (ICRA)*, pages 4437–4444. IEEE, 2018.
- [93] Kelsey P Hawkins, Phillip M Grice, Tiffany L Chen, Chih-Hung King, and Charles C Kemp. Assistive mobile manipulation for self-care tasks around the head. In *2014 IEEE Symposium on computational intelligence in robotic rehabilitation and assistive technologies (CIR2AT)*, pages 16–25. IEEE, 2014.
- [94] KP Hawkins, CH King, TL Chen, and CC Kemp. Informing assistive robots with models of contact forces from able-bodied face wiping and shaving, georgia institute of technology, atlanta, usa. *PDF created on*, 23, 2013.
- [95] Tiffany L Chen, Matei Ciocarlie, Steve Cousins, Phillip M Grice, Kelsey Hawkins, Kaijen Hsiao, Charles C Kemp, Chih-Hung King, Daniel A Lazewatsky, Adam Leeper, et al. Robots for humanity: A case study in assistive mobile manipulation. *IEEE Robotics & Automation Magazine, Special issue on Assistive Robotics*, 20(1):30–39, 2013.
- [96] Yuzhe Qin, Wei Yang, Binghao Huang, Karl Van Wyk, Hao Su, Xiaolong Wang, Yu-Wei Chao, and Dieter Fox. Anyteleop: A general vision-based dexterous robot arm-hand teleoperation system. *arXiv preprint arXiv:2307.04577*, 2023.
- [97] Deepak Gopinath, Siddarth Jain, and Brenna D Argall. Human-in-the-loop optimization of shared autonomy in assistive robotics. *IEEE robotics and automation letters*, 2(1):247–254, 2016.
- [98] Shervin Javdani, Henny Admoni, Stefania Pellegrinelli, Siddhartha S Srinivasa, and J Andrew Bagnell. Shared autonomy via hindsight optimization for teleoperation and teaming. *The International Journal of Robotics Research*, 37(7):717–742, 2018.
- [99] Anca D Dragan and Siddhartha S Srinivasa. A policy-blending formalism for shared control. *The International Journal of Robotics Research*, 32(7):790–805, 2013.
- [100] Tapomayukh Bhattacharjee, Ethan K Gordon, Rosario Scalise, Maria E Cabrera, Anat Caspi, Maya Cakmak, and Siddhartha S Srinivasa. Is more autonomy always better? exploring preferences of users with mobility impairments in robot-assisted feeding. In *Proceedings of the 2020 ACM/IEEE international conference on human-robot interaction*, pages 181–190, 2020.
- [101] Breelyn Kane Styler, Wei Deng, Cheng-Shiu Chung, and Dan Ding. Evaluation of a vision-guided shared-control robotic arm system with power wheelchair users. *Sensors*, 25(15):4768, 2025.
- [102] Mahdieh Nejati Javaremi, Michael Young, and Brenna D Argall. Interface operation and implications for shared-control assistive robots. In *2019 IEEE 16th International Conference on Rehabilitation Robotics (ICORR)*, pages 232–239. IEEE, 2019.
- [103] Larisa YC Loke and Brenna Argall. Interface-level intent inference for environment-agnostic robot teleoperation assistance. *Robotics: Science and Systems*, 2025.

- [104] Siddarth Jain and Brenna Argall. Probabilistic human intent recognition for shared autonomy in assistive robotics. *J. Hum.-Robot Interact.*, 9(1), December 2019.
- [105] Anna Belardinelli. Gaze-based intention estimation: principles, methodologies, and applications in hri. *ACM Transactions on Human-Robot Interaction*, 13(3):1–30, 2024.
- [106] Songpo Li and Xiaoli Zhang. Implicit human intention inference through gaze cues for people with limited motion ability. In *2014 IEEE International Conference on Mechatronics and Automation*, pages 257–262, 2014.
- [107] Vinicius Schettino and Yiannis Demiris. Inference of user-intention in remote robot wheelchair assistance using multimodal interfaces. In *2019 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages 4600–4606, 2019.
- [108] Saturnino Maldonado-Bascon, Cristian Iglesias-Iglesias, Pilar Martín-Martín, and Sergio Lafuente-Arroyo. Fallen people detection capabilities using assistive robot. *Electronics*, 8(9):915, 2019.
- [109] Eugenio Ivorra, Mario Ortega, José M Catalán, Santiago Ezquerro, Luis Daniel Lledó, Nicolás García-Aracil, and Mariano Alcañiz. Intelligent multimodal framework for human assistive robotics based on computer vision algorithms. *Sensors*, 18(8):2408, 2018.
- [110] Derek McColl, Zhe Zhang, and Goldie Nejat. Human body pose interpretation and classification for social human-robot interaction. *International Journal of Social Robotics*, 3(3):313–332, 2011.
- [111] Óscar G Hernández, Vicente Morell, José L Ramon, and Carlos A Jara. Human pose detection for robotic-assisted and rehabilitation environments. *Applied Sciences*, 11(9):4183, 2021.
- [112] Saahil Chand, Andrew McDaid, and Yuqian Lu. Dynamic muscle fatigue assessment using s-emg technology towards human-centric human-robot collaboration. *Journal of Manufacturing Systems*, 68:508–522, 2023.
- [113] Akhil Padmanabha, Jessie Yuan, Tanisha Mehta, Rajat Kumar Jenamani, Eric Hu, Victoria de León, Anthony Wertz, Janavi Gupta, Ben Dodson, Yunting Yan, et al. Waffle: A wearable approach to bite timing estimation in robot-assisted feeding. *arXiv preprint arXiv:2510.03910*, 2025.
- [114] DESÍN LLC. Obi robot, 2024.